



profile series P1128 acrylic diffuser




## DIMENSIONS

## LAMPING

Size	Standard Overall Height*	Diffuser Height	10" Dia.	12" Dia.	16" Dia.	20" Dia.	24" Dia.	Special
1	33"	15"	(4)18BX + Par 30	(4)18BX + Par 30 (3) A-19 60w Max Incand. + Par 30	N/A	N/A	N/A	
2	42"	18"	(4)27BX + Par 30	(4)27BX + Par 30 (6) A-19 60w Max Incand. + Par 30	(4,6 or 8)27BX + Par 38 (6) A-19 75w Max Incand. + Par 38	N/A	N/A	
3	46"	22"	(4)39BX + Par 30	(4 or 6)39BX + Par 30 (6) A-19 60w Max Incand. + Par 30	(4,6 or 8)39BX + Par 38 (6) A-19 75w Max Incand. + Par 38	(4,6 or 8)39BX + Par 38 (6) A-19 100w Max Incand. + Par 38	N/A	CONSULT FACTORY Use "SP" Prefix
4	60"	30"	(4)40BX + Par 30 (4)17T8 + Par 30	(4 or 6)40BX + Par 30 (4 or 6)17T8 + Par 30 (9) A-19 60w Max Incand. + Par 30	(4,6 or 8)40BX + Par 38 (4,6 or 8)17T8 + Par 38 (9) A-19 75w Max Incand. + Par 38	(4,6 or 8)40BX + Par 38 (6 or 8)17T8 + Par 38 (9) A-19 100w Max Incand. + Par 38	(4,6 or 8)40BX + Par 38 (6 or 8)17T8 + Par 38 (9) A-21 150w Max Incand. + Par 38	
5	72"	42"	N/A	(4 or 6)25T8 + Par 30 (12) A-19 60w Max Incand. + Par 30	(4,6 or 8)25T8 + Par 38 (12) A-19 75w Max Incand. + Par 38	(6,8 or 12)25T8 + Par 38 (12) A-19 100w Max Incand. + Par 38	(6,8 or 12)25T8 + Par 38 (12) A-21 150w Max Incand. + Par 38	
6	90"	54"	N/A	N/A	(4,6 or 8)32T8 + Par 38 (15) A-19 75w Max Incand. + Par 38	(6,8 or 12)32T8 + Par 38 (15) A-19 100w Max Incand. + Par 38	(6,8 or 12)32T8 + Par 38 (15) A-21 150w Max Incand. + Par 38	

\*Standard Overall Height - Specify Longer or Shorter Lengths as Required.

**Note: Par Downlights Not Provided Standard on 277 / 347 Volt Units**

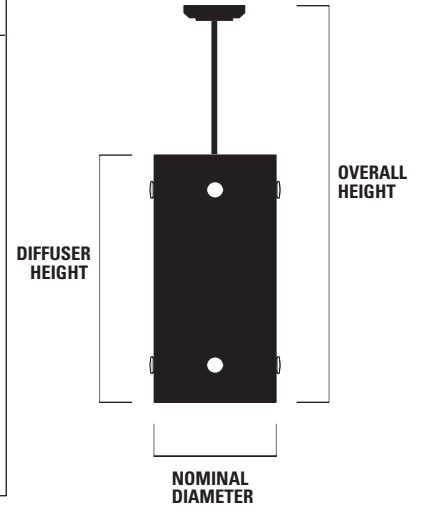

## ORDERING KEY

**P** — 1128 —

MOUNTING	MODEL	DETAIL	DIAMETER	DIFFUSER HT	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HT	FINISH
P- Pendant		1- Sm. Square (Top only)	10"	1- 15"	S- Single Stem	See Matrix	0- Standard	1- 120V	0- Standard	PA- Painted (Specify Color)
X- Special*		2- Lg. Square (Top only)	12"	2- 18"	M- Multi-Pipe		SA- Satin Acrylic	2- 277V ++	X##- Special Overall Height-Indicate in Inches (ie. x60")	PB- Polished Brass
		3- Sm. Round (Top only)	16"	3- 22"	X- Special*		NDL- No Par Downlight	3- 347V ++	A- Will Advise	PC- Polished Nickel Chrome
		4- Lg. Round (Top only)	20"	4- 30"			TD- Acrylic Top Diffuser** †	X- Special*		SN- Satin Nickel Chrome
		5- Sm. Square (Top/Bottom)	24"	5- 42"			BD- Acrylic Bottom Diffuser**			SB- Satin Brass
		6- Lg. Square (Top/Bottom)	X- Special*	6- 54"			PD- Perforated Bottom Diffuser**			AZ- Architectural Bronze
		7- Sm. Round (Top/Bottom)		X- Special*			X- Special*			X- Special*
		8- Lg. Round (Top/Bottom)								
		X- Special*								

++ Consult Factory for 277 / 347 Volt Applications Requiring Downlight

\*Consult Factory Prior to Specification.

\*\*White Standard Consult Factory for Other.

† Not Offered With Incandescent Lamping

## SPECIFICATIONS

### CONSTRUCTION

**Diffuser:** pure virgin acrylic

**Hardware:** solid brass throughout

**Internals:** white powdercoated C.R.S.

### ELECTRICAL

**Incandescent Lamps:** medium base porcelain sockets

**T8 Lamps:** medium bi-pin socket

**Biax Lamps:** 2G11 base sockets - electronic ballast(s)

### CERTIFICATION

**All units:** UL listed dry location


Consult factory for damp location and Canadian labeling.

### MOUNTING

**Standard:** designed for flat horizontal or sloping ceilings using an octagonal J-Box.

### PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**

**davis•muller**  
LIGHTING

28 Beecher Street, Pawtucket, RI 02860

Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)

Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©2005 Davis/Muller Lighting