




DIMENSIONS

	#1111			#1112			#1113			#1114			#1115		
	Flush Overall Height	Semi-Flush Overall Height	Semi-Flush Diffuser Height	Flush Overall Height	Semi-Flush Overall Height	Semi-Flush Diffuser Height	Flush Overall Height	Semi-Flush Overall Height	Semi-Flush Diffuser Height	Flush Overall Height	Semi-Flush Overall Height	Semi-Flush Diffuser Height	Flush Overall Height	Semi-Flush Overall Height	Semi-Flush Diffuser Height
18"	5 5/8"	8 3/8"	4 5/8"	7 1/2"	10 1/4"	6 1/2"	5 3/4"	8 1/2"	4 3/4"	7 1/2"	10 1/4"	6 1/2"	6 1/4"	9"	5 1/4"
24"	6 1/2"	10 1/2"	5 1/2"	8"	12"	7"	6 1/4"	10 1/4"	5 1/4"	8"	12"	7"	7"	11"	6"
30"	7 1/2"	12"	6 1/2"	9 3/4"	14 1/4"	8 3/4"	7 1/4"	11 3/4"	6 1/4"	9 3/4"	14 1/4"	8 3/4"	8 1/2"	13"	7 1/2"
36"	9 1/2"	15"	8 1/2"	11 1/2"	17"	10 1/2"	9"	14 1/2"	8"	11 1/2"	17"	10 1/2"	10"	15 1/2"	9"

LAMPING

	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	(2)Q26	(3)BX13	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
24"	(3)Q26	(4)BX13	(3)60W INC*	
30"	(4)Q26	(3)BX39 (6)BX13	(4)60W INC*	
36"	(4)Q26 (6)Q26	(4)BX39 (6)BX13 (8)BX13	(4)60W INC* (6)60W INC*	

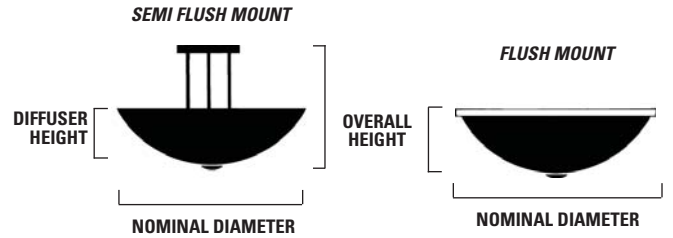

*Lower wattage incandescent lamps may be substituted.

ORDERING KEY

C	MOUNTING	MODEL	DETAIL	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
	C-Ceiling	1111-Shallow Dome	0-Standard	18"	1- Flush	See Matrix	SA-Satin Acrylic	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
	X-Special*	1112-Medium Dome	X-Special*	24"	2- Semi Flush		BP-Bottom Plate (Bottom knob only is standard)	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X16")	PB-Polished Brass
		1113-Straight Sided Dome		30"	X-Special*		NK-No Bottom Knob**	3-347V*		PC-Polished Nickel Chrome
		1114-Indented Dome		36"	X-Special*		X-Special*	X-Special*	A-Will Advise	X-Special*
		1115-Stepped Dome								SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

**"NK" Option requires more complex construction available at additional cost. ("NK" Option not available for semi-flush mount.)

†Maximum overall height not to exceed 6" over standard.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass and C.R.S.
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Biax Lamps:
BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
BX39: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: Consult factory for sloped ceiling applications. (Semi-Flush units only)

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
 www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2001, 2009 Davis/Muller Lighting



profile series **C1110** acrylic diffuser
C1111 - C1115