




Mounts, Diffusers, Buttons, and Finishes may be specified in any combination.

DIMENSIONS

LAMPING

Nominal Diameter	#1121			#1122			#1123			Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
	Flush OA Height	Semi-Flush OA Height	Diffuser Height	Flush OA Height	Semi-Flush OA Height	Diffuser Height	Flush OA Height	Semi-Flush OA Height	Diffuser Height					
18"	5 5/8"	8 3/8"	4 5/8"	7 1/2"	10 1/4"	6 1/2"	5 1/4"	8 1/2"	4 3/4"	(3)PL13	(2)Q26	N/A	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
24"	6 1/2"	10 1/2"	5 1/2"	8"	12"	7"	6 1/4"	10 1/4"	5 1/4"	(4)PL13	(3)Q26	N/A	(3)60W INC*	
30"	7 1/2"	12"	6 1/2"	9 3/4"	14 1/4"	8 3/4"	7 1/4"	11 1/4"	6 1/4"	(6)PL13	(4)Q26	(3)39BX	(4)60W INC	
36"	9 1/2"	15"	8 1/2"	11 1/2"	17"	10 1/2"	9"	14 1/2"	8"	(6)PL13 (8)PL13	(4)Q26 (6)Q26	(4)39BX	(4)60W INC* (6)60W INC*	

*Lower wattage incandescent lamps may be substituted.

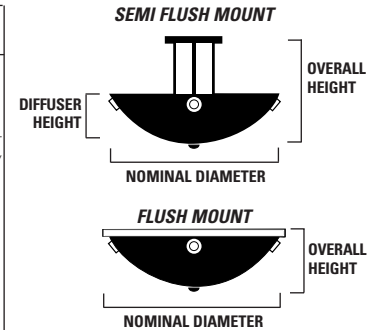

ORDERING KEY

C	MOUNTING	MODEL	BUTTON STYLE	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
C	Ceiling Mount	1121-Shallow Dome	1-Small Square	18"	1-Flush	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X	Special*	1122-Medium Dome	2-Large Square	24"	2-Semi Flush		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 16")	PB-Polished Brass
		1123-Straight Sided Dome	3-Small Round	30"	X-Special*		BP-Bottom Plate (Bottom Knob only is standard)	3-347V		PC-Polished Nickel Chrome
			4-Large Round	36"			NK-No Bottom Knob**	X-Special*	A-Will Advise	X-Special*
			X-Special*							SEE FINISH BROCHURE FOR OPTIONAL FINISHES
			Small Buttons:6/Fixture Large Buttons:3/Fixture				X-Special*			

*Consult Factory Prior to Specification.

**NK Option requires more complex construction available at additional cost.

†Maximum overall height not to exceed 6" over standard.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass and C.R.S.
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
PL Lamps: GX23 base sockets - HPF magnetic ballasts
Quad Lamps: G24q base sockets - electronic ballast(s)
Biax Lamps: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: Consult factory for sloped ceiling applications. (Semi-Flush units only)

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
 www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2001 Davis/Muller Lighting