




DIMENSIONS

LAMPING

Nominal Diameter	Flush Overall Height	Semi-Flush Overall Height	Diffuser Height	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	6 1/4"	9"	5 1/4"	(3)PL13	(2)Q26	N/A	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
24"	7"	11"	6"	(4)PL13	(3)Q26	N/A	(3)60W INC*	
30"	8 1/2"	13"	7 1/2"	(6)PL13	(4)Q26	(3)39BX	(4)60W INC*	
36"	10"	15 1/2"	9"	(6)PL13 (8)PL13	(4)Q26 (6)Q26	(4)39BX	(4)60W INC* (6)60W INC*	

*Lower wattage incandescent lamps may be substituted.

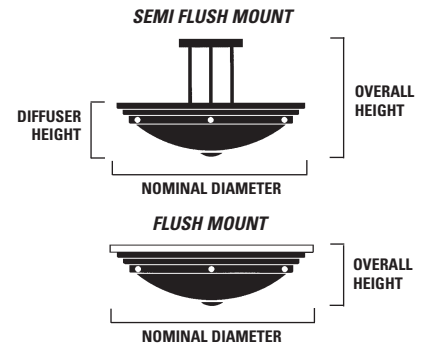

ORDERING KEY

C — 1130

MOUNTING	MODEL	BUTTON STYLE	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
C-Ceiling Mount		0-Square	18"	1-Flush	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		1-Round	24"	2-Semi Flush		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches 1 (ie. X 16")	PB-Polished Brass
	X-Special*	X-Special*	30"	X-Special*		BP-Bottom Plate (Bottom Knob only is standard)	3-347V*	A-Will Advise	PC-Polished Nickel Chrome
			36"			NK-No Bottom Knob**	X-Special*		X-Special *
			X-Special*			X-Special*			SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

**NK' Option requires more complex construction available at additional cost.

†Maximum overall height not to exceed 6" over standard.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic

Hardware: solid brass and C.R.S.

Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets

PL Lamps: GX23 base sockets - HPF magnetic ballasts

Quad Lamps: G24q base sockets - electronic ballast(s)

Biax Lamps: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location

Consult factory for damp location and Canadian labeling.


MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.

Optional: Consult factory for sloped ceiling applications. (Semi-Flush units only)

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

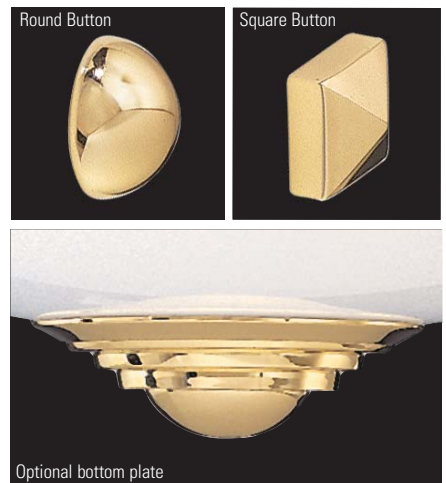

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.

davis muller
LIGHTING

28 Beecher Street, Pawtucket, RI 02860

Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)

Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2002, 2008 Davis/Muller Lighting



profile series C1130 acrylic diffuser