




**DIMENSIONS**

**LAMPING**

Nominal Diameter	Flush Overall Height	Semi-Flush Overall Height**	Diffuser Height	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	5 3/4"	8 3/4"	4 3/4"	(3)PL13	(2)Q26	N/A	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
24"	6 1/4"	11 1/4"	5 1/4"	(4)PL13	(3)Q26	N/A	(3)60W INC*	
30"	7 1/4"	12 1/4"	6 1/4"	(6)PL13	(4)Q26	(3)39BX	(4)60W INC*	
36"	9"	16"	8"	(6)PL13 (8)PL13	(4)Q26 (6)Q26	(4)39BX	(4)60W INC* (6)60W INC*	

\*Lower wattage incandescent lamps may be substituted. \*\*Standard overall height - specify other.

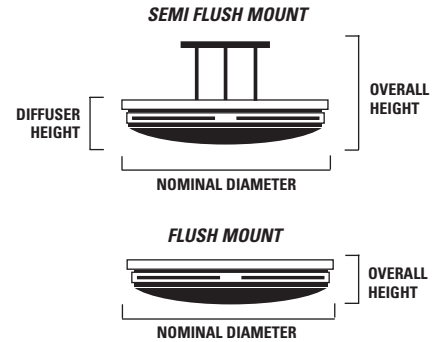

**ORDERING KEY**

**C** — 2110

MOUNTING	MODEL	DETAIL	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
C-Ceiling Mount		0-Standard	18"	1-Flush	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		X-Special*	24"	2-Semi Flush		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 16")	PB-Polished Brass
			30"	X-Special*		BP-Bottom Plate	3-347V		PC-Polished Nickel Chrome
			36"			X-Special *	X-Special*		X-Special *
			X-Special*					A-Will Advise	SEE FINISH BROCHURE FOR OPTIONAL FINISHES

\*Consult factory prior to specification.

†Maximum overall height not to exceed 6" over standard.

**SPECIFICATIONS**

**CONSTRUCTION**

*Diffuser:* pure virgin acrylic  
*Hardware:* solid brass and C.R.S.  
*Internals:* white powdercoated C.R.S.

**ELECTRICAL**

*Incandescent Lamps:* medium base porcelain sockets  
*PL Lamps:* GX23 base sockets - HPF magnetic ballasts  
*Quad Lamps:* G24Q-3 base sockets - electronic ballast(s)  
*Biax Lamps:* 2G11 base sockets - electronic ballast(s)

**CERTIFICATION**

*All units:* UL listed dry location  
 Consult factory for damp location and Canadian labeling.

**MOUNTING**

*Standard:* designed for flat horizontal ceilings using an octagonal J-Box.  
*Optional:* Consult factory for sloped ceiling applications. (semi-flush units only)

**PHOTOMETRICS**

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**



28 Beecher Street, Pawtucket, RI 02860  
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)  
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

© 2001 Davis/Muller Lighting