




**DIMENSIONS**

**LAMPING**

Nominal Diameter	Flush Overall Height	Semi-Flush Overall Height**	Diffuser Height	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	5 3/4"	11 3/4"	4 3/4"	(2)Q26	(3)BX13	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
24"	6 1/4"	14 1/4"	5 1/4"	(3)Q26	(4)BX13	(3)60W INC*	
30"	7 1/4"	17 1/4"	6 1/4"	(4)Q26	(3)BX39 (6)BX13	(4)60W INC*	
36"	9"	21"	8"	(4)Q26 (6)Q26	(4)BX39 (6)BX13 (8)BX13	(4)60W INC* (6)60W INC*	

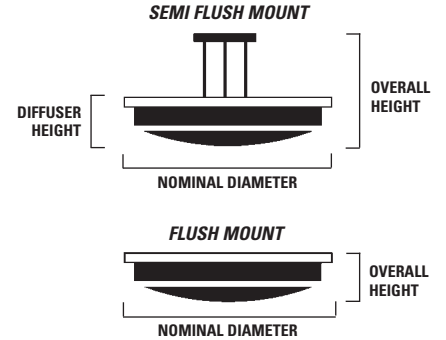

\*Lower wattage incandescent lamps may be substituted. \*\*Standard Overall Height - Specify Other.

**ORDERING KEY**

C — 2165									
MOUNTING	MODEL	DETAIL	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
C-Ceiling Mount		0-Standard	18"	1-Flush	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		X-Special*	24"	2-Semi Flush		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 16")	PB-Polished Brass
			30"	X-Special*		BP-Bottom Plate	3-347V*	A-Will Advise	PC-Polished Nickel Chrome
			36"			HPFA-Hand Painted Faux Alabaster**	X-Special*		SN-Satin Nickel Chrome
			X-Special*			X-Special*			SB-Satin Brass
									DB-Designer Bronze
									X-Special *

\*Consult Factory Prior to Specification.  
 \*\*Hand Painted Faux Alabaster will reduce fixture efficiency.  
 †Maximum overall height not to exceed 6" over standard.

SEE FINISH BROCHURE FOR OPTIONAL FINISHES

**SPECIFICATIONS**

**CONSTRUCTION**

Diffuser: translucent white acrylic  
 Hardware: solid brass and steel components  
 Internals: white painted C.R.S.

**ELECTRICAL**

Incandescent Lamps: medium base porcelain sockets  
 Biax Lamps:

- BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
- BX39: 4-pin 2G11 base sockets - electronic ballast(s)

Quad Lamps: G24q-3 base sockets - electronic ballast(s)

**CERTIFICATION**

All units: UL and cUL listed dry location  
 Consult factory for damp location labeling.

**MOUNTING**

Standard: designed for flat horizontal ceilings using an octagonal J-Box.  
 Optional: Consult factory for sloped ceiling applications.

**PHOTOMETRICS**

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



Optional bottom plate

**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**



28 Beecher Street, Pawtucket, RI 02860  
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)  
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)  
 www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1998, 2002, 2010 Davis/Muller Lighting



elements series **C2165** acrylic diffuser