




DIMENSIONS

LAMPING

Nominal Diameter	Flush Overall Height	Semi-Flush Overall Height**	Diffuser Height	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
20"	5 3/4"	8 3/4"	4 3/4"	(3)13W	(2)Q26	N/A	(3)40W INC*	CONSULT FACTORY Use "SP" Prefix
26"	6 1/4"	11 1/4"	5 1/4"	(4)PL13	(3)Q26	N/A	(3)60W INC*	
32"	7 1/4"	12 1/4"	6 1/4"	(6)PL13	(4)Q26	(3)39BX	(4)60W INC*	
38"	9"	16"	8"	(6)PL13 (8)PL13	(4)Q26 (6)Q26	(4)39BX	(4)60W INC* (6)60W INC*	

*Lower wattage incandescent lamps may be substituted. **Standard Overall Height - Specify Other.

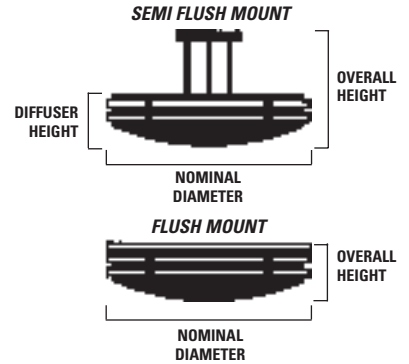

ORDERING KEY

C — 3110

MOUNTING	MODEL	DETAIL	DIAM.	MOUNTING	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
C-Ceiling Mount		0-Standard	20"	1-Flush	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		X-Special*	26"	2-Semi-Flush		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 16")	PB-Polished Brass
			32"	X-Special*		BP-Bottom Plate	3-347V		PC-Polished Nickel Chrome
			38"			X-Special *	X-Special*		SN-Satin Nickel Chrome
			X-Special*					A-Will Advise	SB-Satin Brass
									CB-Two-Tone Chrome & Brass
									X-Special *
									SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

†Maximum overall height not to exceed 6" over standard.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass throughout
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
PL Lamps: GX23 base sockets - HPF magnetic ballasts
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Biax Lamps: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: Consult factory for sloped ceiling applications.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



Optional bottom plate

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1998, 2001 Davis/Muller Lighting