




DIMENSIONS

LAMPING

Nominal Diameter	Overall Height	#1111 Diffuser Height	#1112 Diffuser Height	#1113 Diffuser Height	#1114 Diffuser Height	#1115 Diffuser Height	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	24"	4 3/4"	6"	4 1/4"	6"	5"	(2)Q26	N/A	(3)75W INC*	CONSULT FACTORY
24"	30"	5 1/2"	7"	5 1/4"	7"	6"	(4)Q26	(6)BX13 (8)BX13	(4)100W INC*	
30"	36"	6 1/2"	9"	6 1/4"	9"	7"	(6)Q26 (8)Q26	(3)39BX (4)39BX+ (8)13BX	(6)100W INC*	
36"	36"	8 1/2"	10 1/2"	8"	10 1/2"	9"	(6)Q26 (8)Q26	(3)39BX (4)39BX (6)39BX (8)13BX	(6)150W INC*	
48"	48"	10"	14"	10"	15"	12"	(6)Q26 (8)Q26	(6)39BX (8)39BX	(6)150W INC* (8)150W INC*	

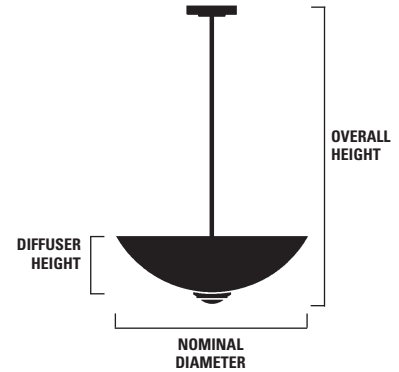

*Lower wattage incandescent lamps may be substituted.
 **Only available for fixture numbers P1112, P1114.
 +Only available for P1112, P1113, P1114.

ORDERING KEY

MOUNTING	MODEL	DETAIL	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
P-Pendant	1111- Shallow Dome	0-Standard	18"	S- Stem	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*	(shown on cover)	X-Special*	24"	X-Special*		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 60")	PB-Polished Brass
	1112-Medium Dome		30"			SWW-45° Swivel	3-347V*		PC-Polished Nickel Chrome
	1113-Straight Sided Dome		36"			TC-Top Cover (Fluorescent only) (Specify Translucent or Clear)	X-Special*		X-Special*
	1114-Indented Dome		48"			SWW-45° Swivel		A-Will Advise	SEE FINISH BROCHURE FOR OPTIONAL FINISHES
	1115-Stepped Dome		X-Special*			TC-Top Cover (Fluorescent only)			
						X-Special*			

*Consult Factory Prior To Specification.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
 Hardware: solid brass throughout
 Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
 Quad Lamps: G24q-3 base sockets - electronic ballast(s)
 Biax Lamps:
 BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
 BX39: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.
 Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box.

SUSPENSION

Standard Length: see dimensional matrix.
 Non-Standard Length:
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports.
 Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1998, 2002, 2009 Davis/Muller Lighting



profile series **P1110** acrylic diffuser

P1111 - P1115