


DIMENSIONS LAMPING

Nominal Diameter	Overall Height	#1121 Diffuser Height	#1122 Diffuser Height	#1123 Diffuser Height	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Metal Halide	Special
18"	24"	4 3/4"	6"	4 3/4"	N/A	(2)Q26	N/A	(3)75W INC*	(1)50W MH (1)70W MH	
24"	30"	5 1/2"	7"	5 1/4"	(6)PL13 (8)PL13	(4)Q26	N/A	(4)100W INC*	(1)100W MH (1)175W MH	
30"	36"	6 1/2"	9"	6 1/4"	(8)PL13	(4)Q26 (6)Q26 (8)Q26	(3)39BX*** (4)39BX***	(6)100W INC*	(1)100W MH (1)175W MH (1)250W ** (1)400W **	CONSULT FACTORY Use "SP" Prefix
36"	36"	8 1/2"	10 1/2"	8"	(8)PL13	(6)Q26 (8)Q26	(3)39BX (4)39BX (6)39BX	(6)150W INC*	(1)100W MH (1)175W MH (1)250W MH (1)400W MH	
48"	48"	10"	14"	10"	Consult Factory	(6)Q26 (8)Q26	(6)39BX (8)39BX	(6)150W INC* (8)150W INC*	(1)175W MH (1)250W MH (1)400W MH (1)1000W **	

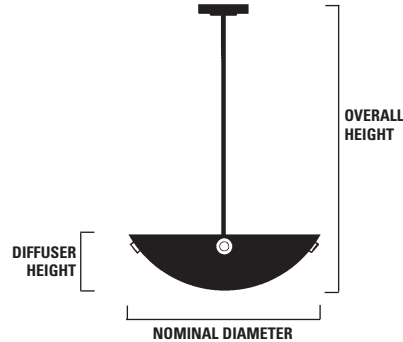

ORDERING KEY

P	MODEL	BUTTON DETAIL	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
P	1120								
P-Pendant	1121-Shallow Dome	1-Small Square	18"	S-Stem	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*	1122-Medium Dome	2-Large Square	24"	M-Multi Pipe		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 60")	PB-Polished Brass
	1123-Straight Sided Dome	3-Small Round	30"	B-Bead Chain		BC-Integral Ballast Canopy (HID only)	3-347V*	A-Will Advise	PC-Polished Nickel Chrome
		4-Large Round	36"	C-Cable		QR-Quartz Restrike (HID only)			X-Special *
		X-Special*	48"	X-Special*		PK1-Pendant Extension Kit †			SEE FINISH BROCHURE FOR OPTIONAL FINISHES
						SWV-45° Swivel (includes PK1 option †)			
						TC-Top Cover† (Fluorescent only) (Specify Translucent or Clear)			
						BP-Bottom Plate **			
						X-Special*			

*Consult Factory Prior to Specification.

†PK1 Option required for overall heights greater than standard. Not required for single stem.

‡ Top cover is not intended to fully seal against dust, bugs and debris.

**Bottom knob required for HID fixtures. Optional for others.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass throughout
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
PL Lamps: GX23 base sockets - HPF magnetic ballasts
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Biax Lamps: 2G11 base sockets - electronic ballast(s)
Up to 175w M.H. Lamp: medium base/vertical/ base-up socket - encased and potted dual-tap ballast (remote mounted)
250-400w M.H. Lamp: mogul base/vertical/base-up socket - encased and potted dual-tap ballast (remote mounted)
1000w M.H. Lamp: mogul base/vertical/base-up socket - core and coil multi-tap ballast (remote mounted)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING


Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK-1).

SUSPENSION

Standard Length: see dimensional matrix.
Non-Standard Length:
 < standard length - consult factory
 > standard length - requires optional pendant extension kit. Extra 6" minimum length required.
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

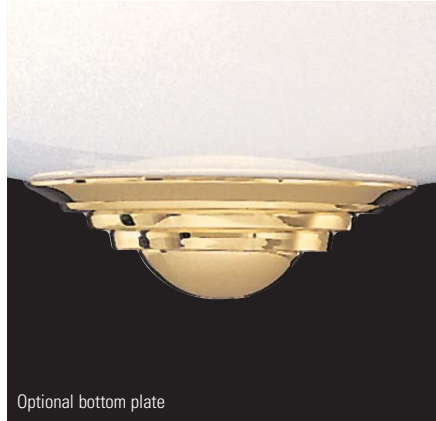

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



SINGLE STEM MOUNT

CABLE MOUNT

BEAD CHAIN MOUNT

MULTI-PIPE MOUNT

DIFFUSER
STYLE
P1121
SHALLOW
DOME



DIFFUSER
STYLE
P1122
MEDIUM
DOME



DIFFUSER
STYLE
P1123
STRAIGHT
SIDED DOME



SMALL ROUND BUTTONS
6 PER FIXTURE

SMALL SQUARE BUTTONS
6 PER FIXTURE

LARGE ROUND BUTTONS
3 PER FIXTURE

LARGE SQUARE BUTTONS
3 PER FIXTURE

**Mounts, Diffusers,
Buttons, and
Finishes may be
specified in any
combination.**