




DIMENSIONS LAMPING

Nominal Diameter	Overall Height	Diffuser Height	Quad Tube Compact Fluorescent	Hex Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent	Metal Halide**	Special
20"	24"	5 1/4"	(2)Q26	(2)H32 (2)H42	N/A	(3)75W INC*	N/A	CONSULT FACTORY Use "SP" Prefix
26"	30"	6"	(4)Q26	(4)H32 (4)H42	(6)BX13 (8)BX13	(4)100W INC*	N/A	
32"	36"	7 1/2"	(6)Q26 (8)Q26	(6)H32 (6)H42 (8)H32 (8)H42	(3)BX39 (8)BX13	(6)100W INC*	(1)100W MH (1)175W MH (1)250W MH	
38"	36"	9"	(6)Q26 (8)Q26	(6)H32 (6)H42 (8)H32 (8)H42	(3)BX39 (4)BX39 (6)BX39 (8)BX13	(6)150W INC*	(1)100W MH (1)175W MH (1)250W MH	
50"	48"	13 1/2"	(6)Q26 (8)Q26	(6)H32 (6)H42 (8)H32 (8)H42	(6)BX39 (8)BX39	(6)150W INC* (8)150W INC*	(1)175W MH (1)250W MH (1)400W MH (1)1000W MH	

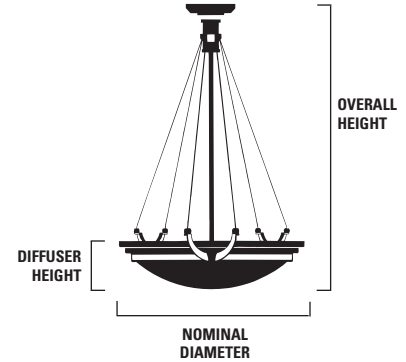

ORDERING KEY

P — 3130											
MOUNTING	MODEL	DETAIL	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH		
P-Pendant		0-Standard	20"	B-Bead Chain	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)		
X-Special*		X-Special*	26"	C-Cable		SA-Satin Acrylic	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 60")	PB-Polished Brass		
			32"	X-Special*		BC-Integral Ballast Canopy (HID only. Up to 400W)	3-347V*		PC-Polished Nickel Chrome		
			38"			QR-Quartz Restrike (HID only)	X-Special*		SN-Satin Nickel Chrome		
			50"	X-Special*		PK3-Pendant Extension Kit ‡		A-Will Advise	SB-Satin Brass		
						SWV-45° Swivel (includes PK3 option)			CB-Two-Tone Chrome & Brass		
						TCW-Top Cover**‡ Translucent White. Fluorescent only.			DB-Designer Bronze		
						HPFA-Hand Painted Faux Alabaster ‡			X-Special *		
						X-Special*			SEE FINISH BROCHURE FOR OPTIONAL FINISHES		

*Consult Factory Prior To Specification.
 ** Top Cover option is intended to shield direct view of lamp but does not fully seal against dust, bugs and debris.
 †PK3 Option required for overall heights greater than standard. Not required for single stem.
 ‡Will reduce fixture efficiency

SPECIFICATIONS

CONSTRUCTION
 Diffuser: translucent white acrylic
 Hardware: solid brass and steel components
 Internals: white painted C.R.S.

ELECTRICAL
 Incandescent Lamps: medium base porcelain sockets
 Biax Lamps:
 BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
 BX39: 4-pin 2G11 base sockets - electronic ballast(s)
 Quad Lamps: G24q-3 base sockets - electronic ballast(s)
 Hex Lamps: GX24q base sockets - electronic ballast(s)
 Metal Halide Lamp:
 EX39 Base; Vertical, base up socket.
 100W to 250W: BT-28 envelope.
 400W: BT-37 envelope. 1000W: BT-56 envelope.
 Remote mounted ballast – consult factory for maximum ballast to lamp distance.

CERTIFICATION
 All units: UL and cUL listed dry location
 Consult factory for damp location labeling.

MOUNTING
 Standard: designed for flat horizontal ceilings using an octagonal J-Box.
 Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK-3).

SUSPENSION
 Standard Length: see dimensional matrix.
 Non-Standard Length:
 < standard length - consult factory
 > standard length - requires optional pendant extension kit. Extra 6" minimum length required.
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS
 Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
 www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.
 ©1999, 2001, 2002, 2010 Davis/Muller Lighting



signature series P3130 *acrylic diffuser*