




DIMENSIONS

LAMPING

| Nominal Diameter | Overall Height | Diffuser Height | Quad Tube Compact Fluorescent | Biaxial Fluorescent | Incandescent* | Special |
|------------------|----------------|-----------------|-------------------------------|---------------------|---------------|------------------------------------|
| 20" | 30" | 4 1/2" | (2)Q26 | N/A | (3)60W INC* | CONSULT FACTORY Use "SP" Prefix |
| 24" | 30" | 5 1/2" | (4)Q26 | (6)BX13 (8)BX13 | (4)100W INC* | |
| 30" | 36" | 6 1/2" | (6)Q26 (8)Q26 | (3)39BX (8)BX13 | (6)100W INC* | |

*Lower wattage incandescent lamps may be substituted.

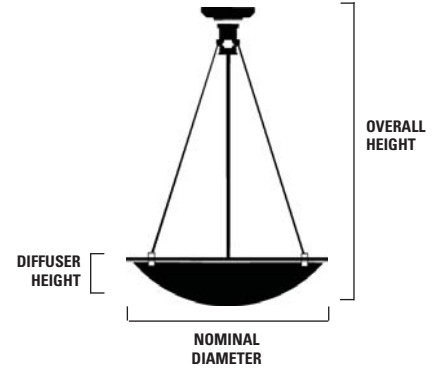

ORDERING KEY

P — **7110**

| MOUNTING | MODEL | DETAIL | DIAM. | HANGER | LAMPING | OPTIONS | VOLTAGE | OVERALL HEIGHT | FINISH |
|------------|-------|------------|-------|------------------------------|------------|--|------------|---|--|
| P-Pendant | | 0-Standard | 20" | C-Cable (Stainless Steel) | See Matrix | 0-Standard | 1-120V | 0-Standard Height | PA-Painted (specify color - see finish brochure) |
| X-Special* | | X-Special* | 24" | F-Flat Strap | | PK3-Pendant Extension Kit † | 2-277V | X##-Special Overall Height-Indicate in inches † (ie. X 60") | PB-Polished Brass |
| | | | 30" | X-Special* | | SWV-45° Swivel (includes PK3 option) | 3-347V* | A-Will Advise | PC-Polished Nickel Chrome |
| | | | | | | TC-Top Cover (Fluorescent only) (Specify Translucent or Clear) | X-Special* | | CB-Two-Tone Chrome & Brass |
| | | | | | | BP-Bottom Plate | | | X-Special* |
| | | | | | | X-Special* | | | |

*Consult Factory Prior To Specification.

†PK3 Option required for overall heights greater than standard.

SEE FINISH BROCHURE FOR OPTIONAL FINISHES

SPECIFICATIONS

CONSTRUCTION

Diffuser: cast acid-etched glass
Hardware: solid brass throughout
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Biax Lamps:
BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
BX39: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING


Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK3).

SUSPENSION

Standard Length: see dimensional matrix.
Non-Standard Length:
 < standard length - consult factory
 > standard length - requires optional pendant extension kit. Extra 6" minimum length required.
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

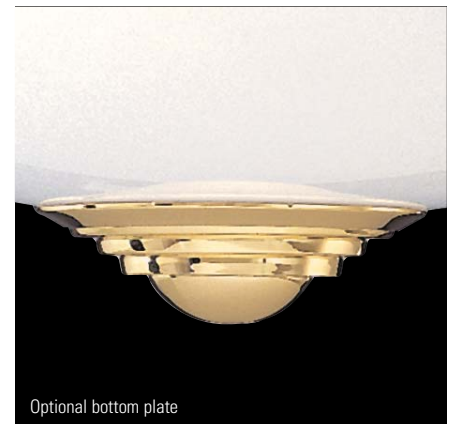

Optional bottom plate

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
 Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
 Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
 www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2001, 2002, 2009 Davis/Muller Lighting



profile series P7110 glass diffuser