




DIMENSIONS

LAMPING

| Nominal Diameter | Overall Height | Diffuser Height | Quad Tube Compact Fluorescent | Biaxial Fluorescent | Incandescent* | Special |
|------------------|----------------|-----------------|-------------------------------|---------------------|---------------|------------------------------------|
| 24" | 30" | 5 1/2" | (4)Q26 | (6)BX13 (8)BX13 | (4)100W INC* | CONSULT FACTORY Use "SP" Prefix |
| 30" | 36" | 6 1/2" | (6)Q26 (8)Q26 | (3)39BX (8)BX13 | (6)100W INC* | |

*Lower wattage incandescent lamps may be substituted.

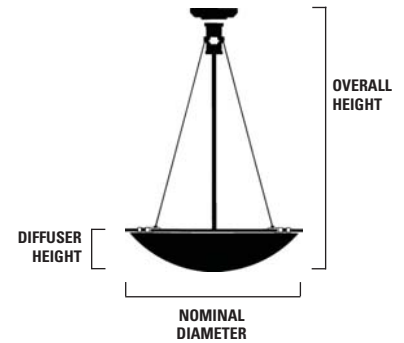

ORDERING KEY

P — 7710

| MOUNTING | MODEL | DETAIL | DIAM. | HANGER | LAMPING | OPTIONS | VOLTAGE | OVERALL HEIGHT | FINISH |
|------------|-------|------------|-------|---------------------------|------------|--|------------|---|--|
| P-Pendant | | 0-Standard | 24" | S-Single Stem | See Matrix | 0-Standard | 1-120V | 0-Standard Height | PA-Painted (specify color - see finish brochure) |
| X-Special* | | X-Special* | 30" | M-Multi-Pipe | | PK3-Pendant Extension Kit † | 2-277V | X##-Special Overall Height-Indicate in inches † (ie. X 60") | PB-Polished Brass |
| | | | | B-Bead Chain | | SWV-45° Swivel (includes PK3 option) | 3-347V* | A-Will Advise | PC-Polished Nickel Chrome |
| | | | | C-Cable (Stainless Steel) | | TC-Top Cover (Fluorescent only) (Specify Translucent or Clear) | X-Special* | | SN-Satin Nickel Chrome |
| | | | | X-Special* | | BP-Bottom Plate | | | SB-Satin Brass |
| | | | | | | X-Special* | | | CB-Two-Tone Chrome & Brass |
| | | | | | | | | | X-Special* |
| | | | | | | | | | SEE FINISH BROCHURE FOR OPTIONAL FINISHES |

*Consult Factory Prior To Specification.

†PK3 Option required for overall heights greater than standard. Not required for single stem.

SPECIFICATIONS

CONSTRUCTION

Diffuser: cast acid-etched glass
Hardware: solid brass throughout
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Biax Lamps:
BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
BX39: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location
 Consult factory for damp location and Canadian labeling.

MOUNTING

Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK3).

SUSPENSION


Standard Length: see dimensional matrix.

Non-Standard Length:

< standard length - consult factory
 > standard length - requires optional pendant extension kit. Extra 6" minimum length required.
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

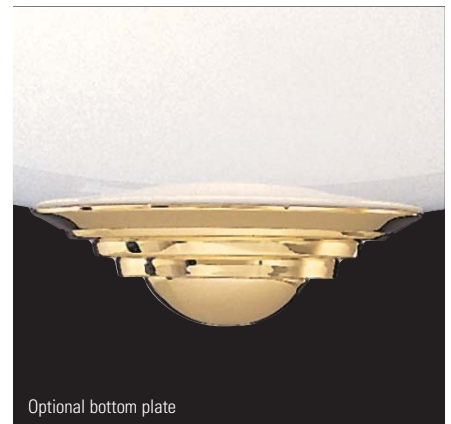

Optional bottom plate

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.

davis muller
LIGHTING

28 Beecher Street, Pawtucket, RI 02860


Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)

Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2002, 20098 Davis/Muller Lighting

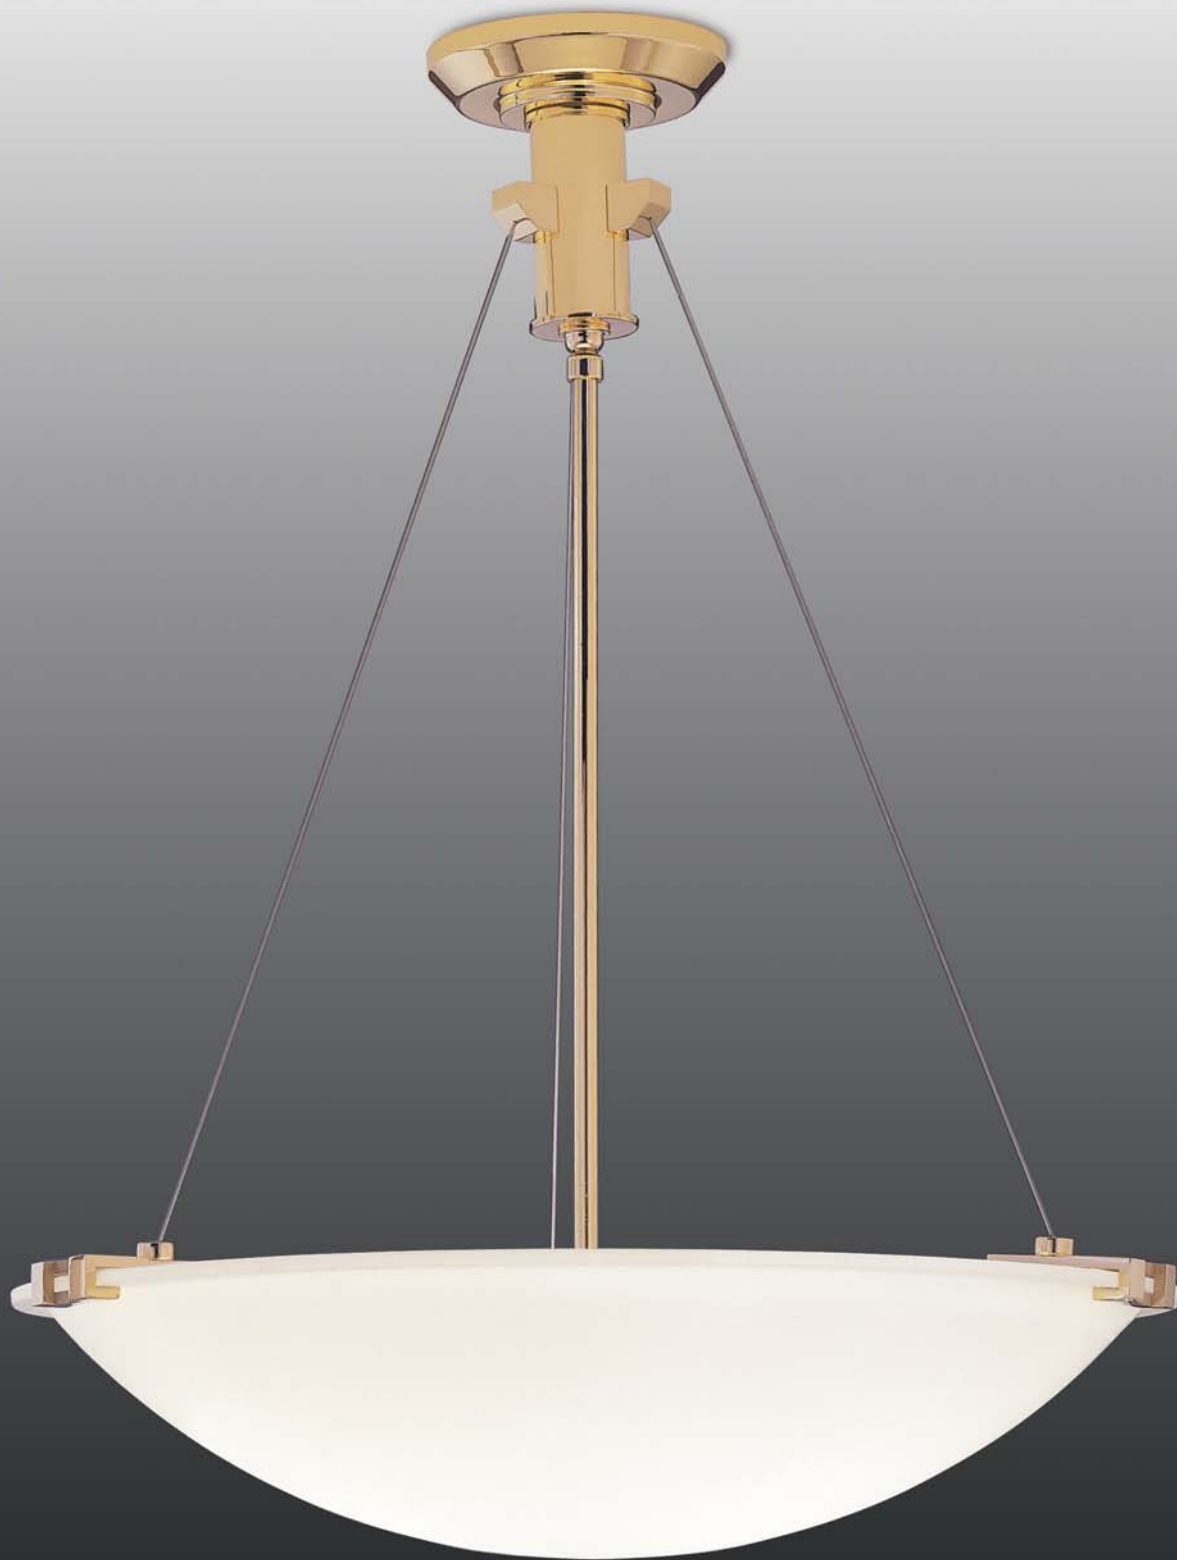

signature series P7710 *glass diffuser*