




DIMENSIONS

LAMPING

Nominal Diameter	Overall Height	Diffuser Height	Twin Tube Compact Fluorescent	Quad/Hex Tube Compact	Biaxial	Incandescent*	Special
16"	24"	5"	N/A	(2)Q26 (2)H32 (2)H42	N/A	(3)60 W INC*	CONSULT FACTORY Use "SP" Prefix
24"	30"	6"	(6)PL13 (8)PL13	(4)Q26 (4)H32 (4)H42	N/A	(4)100W INC*	
30"	36"	6 1/2"	(8)PL13	(4)Q26 (4)H32 (4)H42	(4)BX18	(4)100W INC*	
36"	36"	8 1/4"	(8)PL13	(6)Q26 (8)Q26 (6)H32 (6)H42	(3)BX39 (4)BX39	(6)100W INC*	

*Lower wattage incandescent lamps may be substituted.

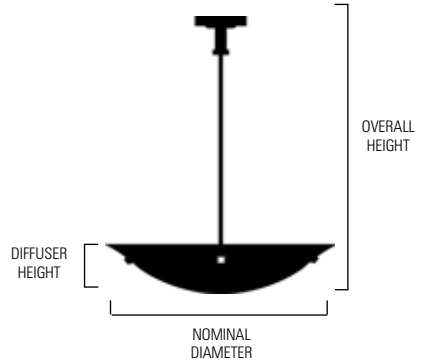

ORDERING KEY

MOUNTING	MODEL	BUTTON DETAIL**	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
P - Pendant	8110	1 - Small Square	16"	S - Stem	See Matrix	O - Standard	1 - 120V	O - Standard Height	PA - Painted (specify color - see finish brochure)
X - Special*		2 - Large Square	24"	M - Multi Pipe		PK3 - Pendant Extension Kit	2 - 277V	X## - Special Overall Height - Indicate in inches† (ie. X 60")	PB - Polished Brass
		3 - Small Round	30"	B - Bead Chain		SWV - 45° Swivel includes PK3 option†	3 - 347V		PC - Polished Nickel Chrome
		4 - Large Round	36"	C - Cable		TC - Top Cover (Fluorescent only) (Specify Translucent or Clear)	X - Special*		SN - Satin Nickel Chrome
		X - Special*	X - Special*	X - Special*		BP - Bottom Plate*			SB - Satin Brass
		**Small Buttons: 6/Fixtures Large Buttons: 3/Fixtures				X - Special*			BZ - Statuary Bronze Finish
									X - Special*
									SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

†PK3 Option required for overall heights greater than standard. Not required for single stem.

SPECIFICATIONS

CONSTRUCTION

Diffuser: acrylic faux alabaster
Hardware: solid brass throughout
Internals: white painted C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
Quad Lamps: G24q-3 base sockets - electronic ballast(s)
Hex Lamps: GX24q base sockets - electronic ballast(s)
Biax Lamps 2G11 base sockets - electronic ballast(s)
BX18: 4-pin 2G11 base sockets - electronic ballast(s)
BX39: 4-pin 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL and cUL listed dry location
Consult factory for damp location labeling.

MOUNTING


Standard: designed for flat horizontal ceilings using an octagonal J-Box.
Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK3).

SUSPENSION

Standard Length: see dimensional matrix.
Non-Standard Length:
< standard length - consult factory
> standard length - requires optional pendant extension kit. Extra 6" minimum length required.
Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports.
Davis/Muller will gladly run photometric reports for your application at no cost or obligation.
Ask your sales representative for details.

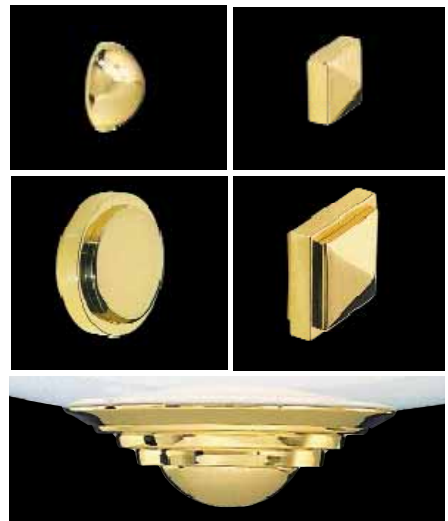

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG



82 Stevens Street Taunton MA 02188
Toll Free 800-977-4470
Fax Line 508-824-8722
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.
©1999, 2001, 2002, 2010 Davis/Muller Lighting



profile series P8110 faux alabaster diffuser