




DIMENSIONS

LAMPING

Nominal Diameter	Overall Height	Diffuser Height	Quad/Hex/Tube Compact	Biaxial	Incandescent*	Special
16"	24"	5"	(2)Q26 (2)H32 (2)H42	N/A	(2)60 W INC*	
24"	30"	6"	(4)Q26 (4)H32 (4)H42	(6)BX13 (8)BX13	(3)100W INC*	CONSULT FACTORY
30"	36"	6 1/2"	(4)Q26 (4)H32 (4)H42	(4)BX18 (8)BX13	(4)100W INC*	Use "SP" Prefix
36"	36"	8 1/4"	(6)Q26 (8)Q26 (6)H32 (6)H42	(3)BX39 (4)BX39 (8)BX13	(6)100W INC*	

*Lower wattage incandescent lamps may be substituted.

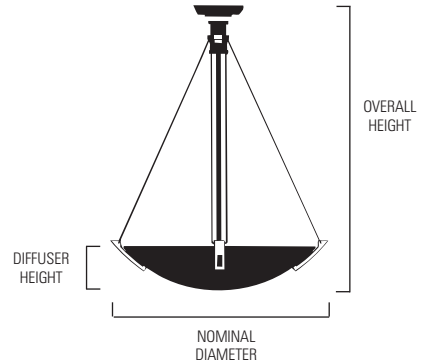

ORDERING KEY

P	8320								
MOUNTING	MODEL	DETAIL	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
P-Pendant		1-Single Cable	16"	C-Cable (Stainless Steel)	See Matrix	0-Standard	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		2-Twin Cable	24"			PK3-Pendant Extension Kit †	2-277V	X# #-Special Overall Height-Indicate in inches † (ie. X60#)	PB-Polished Brass
		X-Special*	30"	X-Special*		SWW-45° Swivel (includes PK3 option)	3-347V*		PC-Polished Nickel Chrome
			36"			TCW-Top Cover**	X-Special*		SN-Satin Nickel Chrome
			X-Special*			Translucent White. Fluorescent only		A-Will Advise	SB-Satin Brass
						X-Special *			CB-Two-Tone Chrome & Brass
									BZ-Statuary Bronze Finish
									DB-Designer Bronze
									X-Special*
									SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

** Top Cover option will reduce fixture efficiency and is not intended to fully seal against dust, bugs and debris.

†PK3 Option required for overall heights greater than standard.

SPECIFICATIONS

CONSTRUCTION

Diffuser: acrylic faux alabaster
 Hardware: solid brass throughout
 Internals: white painted C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
 Quad Lamps: G24q-3 base sockets - electronic ballast(s)
 Hex Lamps: GX24q base sockets - electronic ballast(s)
 Biax Lamps:
 BX13: 4-pin 2GX7 base sockets - electronic ballast(s)
 BX18: 4-pin 2G11 base sockets - electronic ballast(s)
 BX39: 4-pin 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL and cUL listed dry location
 Consult factory for damp location labeling.

MOUNTING

Due to the weight of natural alabaster all fixtures except 16" dia. size require supplemental support per electrical code(s).
 Standard: designed for flat horizontal ceilings using an octagonal J-Box.
 Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box.
 Requires optional pendant extension kit (PK3).

SUSPENSION

Standard Length: see dimensional matrix.
 Non-Standard Length:
 < standard length - consult factory
 > standard length - requires optional pendant extension kit. Extra 6" minimum length required.
 Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports.
 Davis/Muller will gladly run photometric reports for your application at no cost or obligation.
 Ask your sales representative for details.

Matched companion fixtures available. consult catalog.



signature series P8320 *faux alabaster diffuser*