




DIMENSIONS LAMPING

Nominal Diameter	Overall Height	Diffuser Height	Twin Tube Compact Fluorescent	Quad/Hex Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
18"	24"	5"	N/A	(2)Q26 (2)H32 (2)H42	N/A	(3)75W INC*	CONSULT FACTORY Use "SP" Prefix
24"	30"	6"	(6)PL13 (8)PL13	(4)Q26 (4)H32 (4)H42	N/A	(4)100W INC*	
36"	36"	10"	(8)PL13	(6)Q26 (6)H32 (6)H42 (8)Q26	(3)39BX (4)39BX (6)39BX	(6)150W INC*	

*Lower wattage incandescent lamps may be substituted.

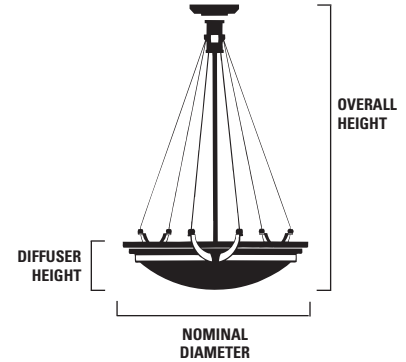

ORDERING KEY

P — 8330

MOUNTING	MODEL	DETAIL	DIAM.	HANGER	LAMPING	OPTIONS	VOLTAGE	OVERALL HEIGHT	FINISH
P-Pendant		0-Standard	18"	B-Bead Chain	See Matrix	PK3-Pendant Extension Kit †	1-120V	0-Standard Height	PA-Painted (specify color - see finish brochure)
X-Special*		X-Special*	24"	C-Cable		SWV-45° Swivel (includes PK3 option)	2-277V	X##-Special Overall Height-Indicate in inches † (ie. X 60")	PB-Polished Brass
			36"	X-Special*		TC-Top Cover‡ (Fluorescent only) (Specify Translucent or Clear)	3-347V*	X-Special*	PC-Polished Nickel Chrome
			X-Special*			X-Special *		A-Will Advise	SN-Satin Nickel Chrome
									SB-Satin Brass
									CB-Two-Tone Chrome & Brass
									BZ-Statuary Bronze Finish
									X-Special *
									SEE FINISH BROCHURE FOR OPTIONAL FINISHES

*Consult Factory Prior to Specification.

†PK3 Option required for overall heights greater than standard.

Not required for single stem.

‡ Top cover is not intended to fully seal against dust, bugs and debris.

SPECIFICATIONS

CONSTRUCTION

Diffuser: heavy walled natural alabaster

Note: Alabaster is a natural cut stone product. As such, variations in color, veining, and translucency should be expected.

Hardware: solid brass throughout

Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets

PL Lamps: GX23 base sockets - HPF magnetic ballasts

Quad Lamps: G24q-3 base sockets - electronic ballast(s)

HEX Lamps: G24q base sockets - electronic ballast(s)

Biax Lamps: 2G11 base sockets - electronic ballast(s)

CERTIFICATION

All units: UL listed dry location

Consult factory for damp location and Canadian labeling.

MOUNTING

Due to the weight of natural alabaster all fixtures except 18" dia. size require supplemental support per electrical code(s).

Standard: designed for flat horizontal ceilings using an octagonal J-Box.

Optional: max. 45° swivel for sloped ceilings and/or seismic compliance. Mounts to an octagonal J-Box. Requires optional pendant extension kit (PK3).

SUSPENSION

Standard Length: see dimensional matrix.

Non-Standard Length:

< standard length - consult factory

> standard length - requires optional pendant extension kit. Extra 6" minimum length required.

Stems made in maximum 4 ft. lengths. Longer lengths use couplings as required.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860

Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)

Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2002, 2008 Davis/Muller Lighting



signature series P8330 *alabaster diffuser*