



SIZE 1



SIZE 2



SIZE 3



SIZE 4


DIMENSIONS

LAMPING


Size	Width x Height	Extension	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
1	7"x9"	4" ADA**	(1)PL13	N/A	N/A	(1)60W INC*	CONSULT FACTORY Use "SP" Prefix
2	9"x10"	5 1/2"	(2)PL13	(1)Q26	N/A	(1)100W INC*	
3	7"x16"	4" ADA**	(2)PL13	N/A	(1)27BX	(2)60W INC*	
4	9"x20"	5 1/2"	N/A	N/A	(1)39BX (2)39BX	(3)75W INC*	

*Lower wattage incandescent lamps may be substituted.

SIZE 1 & 2



SIZE 3 & 4



****Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

ORDERING KEY

S — **4310** —

MOUNTING	MODEL	SIZE	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S -Sconce		1- 7"x 9"	0 -No Buttons	See Matrix	0 -Standard	1-120V	PA -Painted Special Color (see finish brochure)
X -Special*		2- 9"x 10"	1 -Round Buttons		TD -Top Diffuser† (Specify Translucent or Clear Prismatic)	2-277V	PB -Polished Brass
		3- 7"x 16"	2 -Square Buttons		BD -Bottom Diffuser (Specify Translucent or Clear Prismatic)	3-347V*	PC -Polished Nickel Chrome
		4- 9"x 20"	X -Special*		SA -Satin Acrylic X -Special*	X -Special*	X -Special* SEE FINISH BROCHURE FOR OPTIONAL FINISHES

†Available For Fluorescent Models Only.
*Consult Factory Prior To Specification.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass and C.R.S.
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
PL Lamps: GX23 base sockets - HPF magnetic ballasts
Quad Lamps: G24q base sockets - electronic ballast(s)
Biax Lamps: 2G11 base sockets - electronic ballast(s)

CERTIFICATION


All units: UL listed dry location
Consult factory for damp location and Canadian labeling.

MOUNTING

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly higher or lower, or when top or bottom are plainly visible (such as in stairwells or multi-story atria) optional top and/or bottom diffusers are recommended. Note that these diffusers will reduce total light output of fixture.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

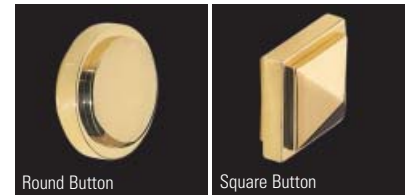

Round Button

Square Button

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2001 Davis/Muller Lighting