



Regressed Diffuser



Perf Diffuser




Flush Diffuser

**DIMENSIONS**

**LAMPING**

Width	Height	Extension	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Incandescent*	Special
12"	12"	4" <b>ADA**</b>	(2)PL13	(1)Q26 (2)Q26	(2)60W T10* <small>*Lower wattage incandescent lamps may be substituted.</small>	CONSULT FACTORY Use "SP" Prefix

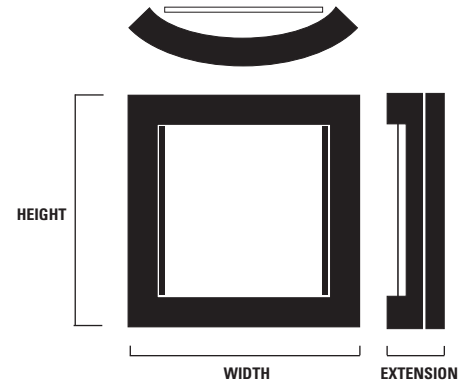

**\*\*Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

**ORDERING KEY**

S — 4510						
MOUNTING	MODEL	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S-Sconce		0-Regressed Diffuser (White Acrylic)	See Matrix	0-Standard	1-120V	BA-Brushed Aluminum
X-Special*		1-Flush Diffuser (White Acrylic)		SA-Satin Acrylic	2-277V	BK-Painted Black
		2-Perf Diffuser** (White Acrylic Overlay)		SNP-Satin Nickel Perf Diffuser	3-347V*	WH-Painted White
		X-Special*		TD-Top Diffuser†	X-Special*	PA-Painted Special Color (see finish brochure)
				BD-Bottom Diffuser		DB-Designer Bronze
				SB-Side Baffles		X-Special*
				HPFA-Hand Painted Faux Alabaster		Add Suffix "Tex" for Textured Finish. SEE FINISH BROCHURE FOR OPTIONAL FINISHES
				X-Special*		

†Available For Fluorescent Models Only.

\*Consult Factory Prior To Specification.

\*\* Perf Diffuser Has Same Finish As Fixture Unless Otherwise Specified.

**SPECIFICATIONS**

**CONSTRUCTION**

**Diffuser:** translucent white acrylic  
**Hardware:** die cast aluminum alloy  
**Internals:** white painted C.R.S.

**ELECTRICAL**

**Incandescent Lamps:** medium base porcelain sockets  
**PL Lamps:** GX23 base sockets - HPF magnetic ballasts  
**Quad Lamps:** G24q base sockets - electronic ballast(s)

**CERTIFICATION**

**All units:** UL and cUL listed dry location  
 Consult factory for damp location and Canadian labeling.

**MOUNTING**

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly higher or lower, or when top or bottom are plainly visible (such as in stairwells or multi-story atria) optional top and/or bottom diffusers are recommended. Note that these diffusers will reduce total light output of fixture.

**PHOTOMETRICS**

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.



Consult Factory For Optional Custom Signage

**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**



28 Beecher Street, Pawtucket, RI 02860

Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)

Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)

www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2002, 2010 Davis/Muller Lighting



profile series **S4510** acrylic diffuser  
perf diffuser