



Solid Band



Solid Band with Square Buttons




Slotted Band

DIMENSIONS

LAMPING

| Width | Height | Extension | Biaxial Fluorescent | Quad Tube Compact Fluorescent | Incandescent* | Special |
|-------|--------|--------------------|---------------------|-------------------------------|---|------------------------------------|
| 12" | 12" | 4" ADA** | (2)BX13 | (1)Q26 (2)Q26 | (2)60W T10* <small>*Lower wattage incandescent lamps may be substituted.</small> | CONSULT FACTORY Use "SP" Prefix |

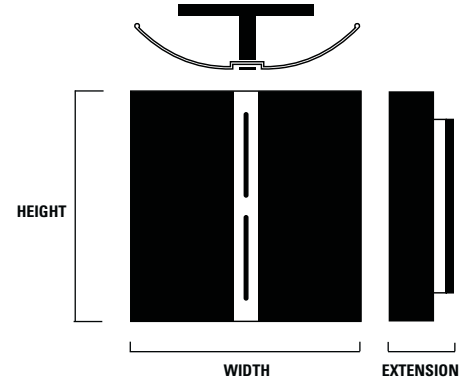

****Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

ORDERING KEY

| MOUNTING | MODEL | DETAIL | LAMPING | OPTIONS | VOLTAGE | FINISH |
|---------------------|-------------|---|------------|-----------------------------|---------------------|---|
| S - Sconce | 5210 | 0 - Solid Band | See Matrix | O - Standard | 1 - 120V | PA - Painted (specify color) |
| X - Special* | | 1 - Slotted Band | | SA - Satin Acrylic | 2 - 277V | PB - Polished Brass |
| | | 2 - Solid Band w/Round Buttons (Shown on cover) | | TD - Top Diffuser† | 3 - 347V* | PC - Polished Nickel Chrome |
| | | 3 - Solid Band w/Square Buttons | | BD - Bottom Diffuser | X - Special* | X - Special* |
| | | X - Special* | | SD - Side Diffuser | | SEE FINISH BROCHURE FOR OPTIONAL FINISHES |
| | | | | X - Special* | | |

†Available For Fluorescent Models Only. White Translucent Standard.
*Consult Factory Prior To Specification.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: solid brass
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base porcelain sockets
BX13 Lamps: 4-pin 2GX7 base sockets - electronic ballast
Quad Lamps: G24q base sockets - electronic ballast(s)

CERTIFICATION


All units: UL listed dry location
Consult factory for damp location and Canadian labeling.

MOUNTING

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly lower, or when top is plainly visible (such as in stairwells or multi-story atria) optional top diffuser is recommended. Note that this diffuser will reduce total light output of fixture.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

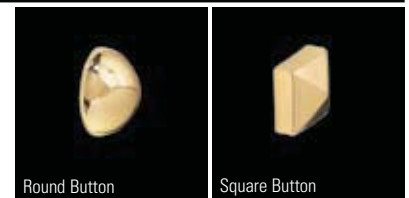

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©2004, 2009 Davis/Muller Lighting



elements series S5210 acrylic diffuser