



White Acrylic Diffuser

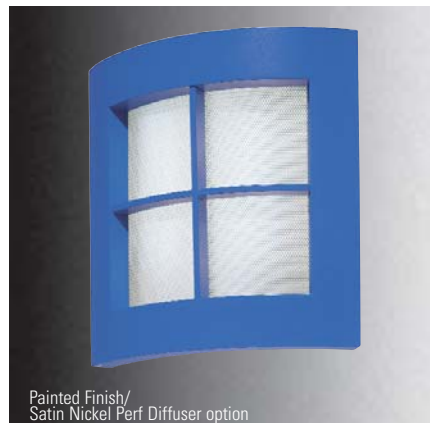

Painted Finish/
Satin Nickel Perf Diffuser option

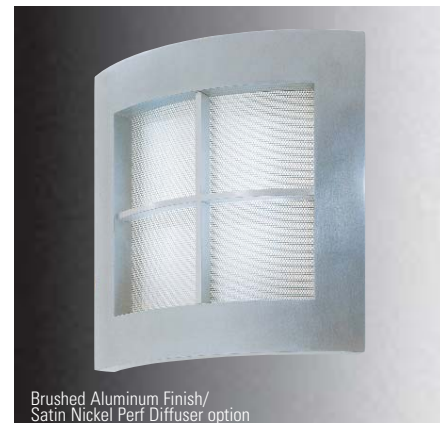


Brushed Aluminum Finish/
Satin Nickel Perf Diffuser option

DIMENSIONS

LAMPING

Width	Height	Extension	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Incandescent*	Special
12"	12"	4" ADA**	(2)PL13	(1)Q26 (2)Q26	(2)60W T10*(medium base) *Lower wattage incandescent lamps may be substituted.	CONSULT FACTORY Use "SP" Prefix

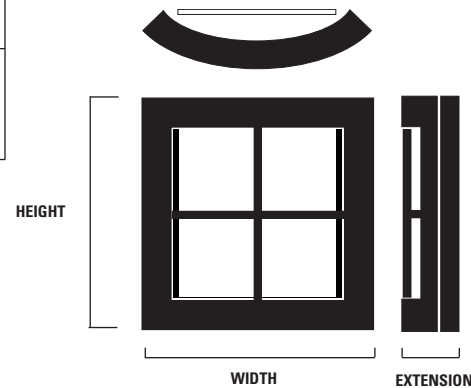

****Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

ORDERING KEY

MOUNTING	MODEL	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S - Sconce	5510	0 - White Acrylic Diffuser	See Matrix	O - Standard	1 - 120V	BA - Brushed Aluminum
X - Special*		2 - Perf Diffuser** (White Acrylic Overlay)		SA - Satin Acrylic	2 - 277V	BK - Painted Black‡
		3 - Frosted Glass Diffuser		TD - Top Diffuser† (Specify Translucent or Clear Prismatic)	3 - 347V*	WH - Painted White‡
		X - Special*		BD - Bottom Diffuser (Specify Translucent or Clear Prismatic)	X - Special*	PA - Painted Special Color‡ (see finish brochure)
				SNP - Satin Nickel Perf Diffuser		X - Special*
				X - Special*		‡Add Suffix "Tex" For Textured Finish.

†Available For Fluorescent Models Only.
*Consult Factory Prior To Specification.
**Perf Diffuser Has Same Finish As Fixture Unless Otherwise Specified.

SPECIFICATIONS

CONSTRUCTION

Diffuser: pure virgin acrylic
Hardware: die cast aluminum alloy
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamps: medium base sockets
PL Lamps: GX23 base sockets - HPF magnetic ballasts
Quad Lamps: G24q base sockets - electronic ballast(s)

CERTIFICATION


All units: UL listed dry location
Consult factory for damp location and Canadian labeling.

MOUNTING

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly higher or lower, or when top or bottom are plainly visible (such as in stairwells or multi-story atria) optional top and/or bottom diffusers are recommended. Note that these diffusers will reduce total light output of fixture.

PHOTOMETRICS

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

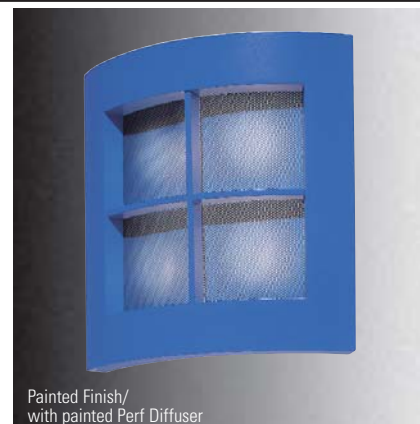

Painted Finish/
with painted Perf Diffuser

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



28 Beecher Street, Pawtucket, RI 02860
Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)
Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.
©1999, 2008 Davis/Muller Lighting



elements series **S5510** acrylic diffuser
perf diffuser
glass diffuser