




White Glass Shade

DIMENSIONS

LAMPING

Width	Height	Extension	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Incandescent*	Special
6 1/2"	11 5/8"	4" ADA**	(1)BX13	(1)Q26	(1)60W* T10 Max *Lower wattage incandescent lamps may be substituted.	CONSULT FACTORY Use "SP" Prefix

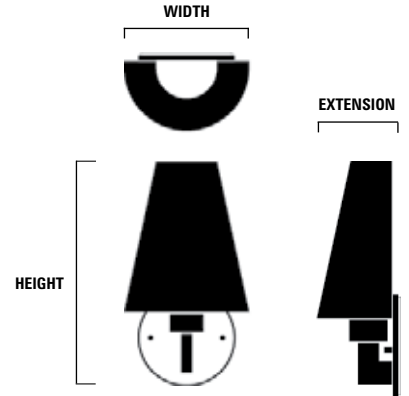

****Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

ORDERING KEY

S — **5750** — — — — —

MOUNTING	MODEL	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S-Sconce X-Special*		1-White Glass Shade	See Matrix	O-Standard	1-120V 2-277V 3-347V* X-Special*	PB-Polished Brass PC-Polished Nickel SN-Satin Nickel

SEE FINISH BROCHURE FOR OPTIONAL FINISHES

SPECIFICATIONS

CONSTRUCTION

Diffuser: cast glass shade
Hardware: die cast zinc alloy
Internals: white powdercoated C.R.S.

ELECTRICAL

Incandescent Lamp: medium base porcelain socket
BX13 Lamp: 4-pin 2GX7 base socket - electronic ballast
Quad Lamp: G24q base socket - electronic ballast

CERTIFICATION

All units: UL listed dry location
Consult factory for damp location and Canadian labeling.

MOUNTING

Designed for flat wall surfaces using an octagonal J-Box.

PHOTOMETRICS

Consult technical section for photometric reports.
Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.



82 Stevens Street Taunton MA 02178
Toll Free 800-977-4470
Fax Line: 508-824-8722

www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.
©2004, 2009 Davis/Muller Lighting



elements series **S5750** white glass shade