



SIZE 1



SIZE 2



SIZE 3



SIZE 4


**DIMENSIONS**

**LAMPING**


Size	Width x Height	Extension	Twin Tube Compact Fluorescent	Quad Tube Compact Fluorescent	Biaxial Fluorescent	Incandescent*	Special
1	7"x9"	4" <b>ADA**</b>	(1)PL13	N/A	N/A	(1)60W INC*	CONSULT FACTORY Use "SP" Prefix
2	9"x10"	5 1/2"	(2)PL13	(1)Q26	N/A	(1)100W INC*	
3	7"x16"	4" <b>ADA**</b>	(2)PL13	N/A	(1)27BX	(2)60W INC*	
4	9"x20"	5 1/2"	N/A	N/A	(1)39BX (2)39BX	(3)75W INC*	

\*Lower wattage incandescent lamps may be substituted.

**SIZE 1 & 2**



**SIZE 3 & 4**

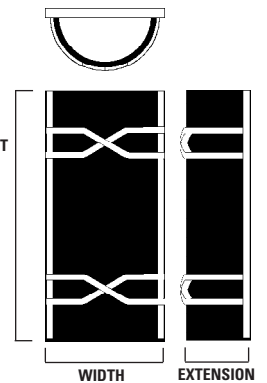

**\*\*Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

**ORDERING KEY**

MOUNTING	MODEL	SIZE	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S-Sconce	6310	1- 7" x 9"	A-Style A : Horizontal Bars	See Matrix	O-Standard	1-120V	PA-Painted Special Color (see finish brochure)
X-Special*		2- 9" x 10"	B-Style B : Horizontal & Vertical Bars		TD-Top Diffuser (Specify Translucent or Clear Prismatic)	2-277V	PB-Polished Brass
		3- 7" x 16"	C-Style C : Horizontal Bars with Medallions		BD-Bottom Diffuser (Specify Translucent or Clear Prismatic)	3-347V	PC-Polished Nickel Chrome
		4- 9" x 20"	D-Style D : Horizontal Bars with Round Knob		SA-Satin Acrylic	X-Special*	SN-Satin Nickel Chrome
			E-Style E : Horizontal Bars with Square Knob		X-Special*		SB-Satin Brass
			F-Style F : Crossed Bars				CB-2Tone Chrome & Brass
			G-Style G : Wavy Bars				BZ-Statuary Bronze Finish
			X-Special*				X-Special*

†Available For Fluorescent Models Only.  
\*Consult Factory Prior To Specification.

SEE FINISH BROCHURE FOR OPTIONAL FINISHES

**SPECIFICATIONS**

**CONSTRUCTION**

Diffuser: pure virgin acrylic  
Hardware: solid brass and C.R.S.  
Internals: white powdercoated C.R.S.

**ELECTRICAL**

Incandescent Lamps: medium base porcelain sockets  
PL Lamps: GX23 base sockets - HPF magnetic ballasts  
Quad Lamps: G24q-3 base sockets - electronic ballast(s)  
Biax Lamps: 2G11 base sockets - electronic ballast(s)

**CERTIFICATION**

All units: UL listed dry location  
Consult factory for damp location and Canadian labeling.

**MOUNTING**

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly higher or lower, or when top or bottom are plainly visible (such as in stairwells or multi-story atria) optional top and/or bottom diffusers are recommended. Note that these diffusers will reduce total light output of fixture.

**PHOTOMETRICS**

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**



28 Beecher Street, Pawtucket, RI 02860  
Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)  
Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)  
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©2001 Davis/Muller Lighting