



profile series **S4110** acrylic diffuser




**DIMENSIONS**

**LAMPING**

Size	Width	Height	Extension	Quad Tube Compact Fluorescent	Incandescent*	Special
1	14"	7"	4" <b>ADA**</b>	(2)Q13 (1)Q18 (1)Q26	(1)60W INC*	CONSULT FACTORY Use "SP" Prefix

\*Lower wattage incandescent lamps may be substituted.

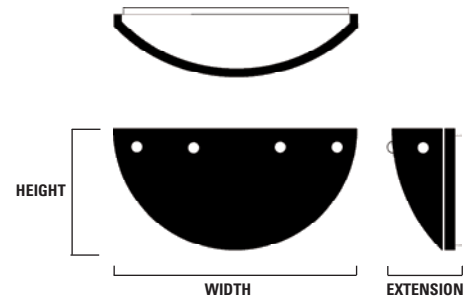

**\*\*Complies with maximum 4" extension requirements of the Americans with Disabilities Act.**

**ORDERING KEY**

S — 4110 — — — — —							
MOUNTING	MODEL	SIZE	DETAIL	LAMPING	OPTIONS	VOLTAGE	FINISH
S-Sconce		1-14"	0-Plain	See Matrix	0-Standard	1-120V	PA-Painted (specify color see finish brochure)
X-Special*			1-Buttons 2-Bottom Finial X-Special*		SA-Satin Acrylic TD-Top Diffuser† (Specify Translucent or Clear Prismatic) X-Special*	2-277V 3-347V* X-Special*	PB-Polished Brass PC-Polished Nickel Chrome X-Special* SEE FINISH BROCHURE FOR OPTIONAL FINISHES

†Available For Fluorescent Models Only.  
\*Consult Factory Prior To Specification.

**SPECIFICATIONS**

**CONSTRUCTION**

**Diffuser:** pure virgin acrylic  
**Hardware:** solid brass and C.R.S.  
**Internals:** white powdercoated C.R.S.

**ELECTRICAL**

**Incandescent Lamps:** medium base porcelain sockets  
**Q18/Q26 Lamps:** G24Q base sockets - electronic ballast(s).  
**Q13 Lamps:** GX23 base sockets - HPF magnetic ballast.

**CERTIFICATION**

**All units:** UL listed dry location  
Consult factory for damp location and Canadian labeling.

**MOUNTING**

Designed for flat wall surfaces using an octagonal J-Box. Fixtures are intended for mounting with their center point at or slightly above eye-level. For applications where fixtures are mounted significantly lower, or when top is plainly visible (such as in stairwells or multi-story atria) optional top diffuser is recommended. Note that this diffuser will reduce total light output of fixture.

**PHOTOMETRICS**

Consult technical section for photometric reports. Davis/Muller will gladly run photometric reports for your application at no cost or obligation. Ask your sales representative for details.

**MATCHED COMPANION FIXTURES AVAILABLE. CONSULT CATALOG.**



28 Beecher Street, Pawtucket, RI 02860  
Toll Free Specifier Info. Line: (888) DAV-MULL (888-328-6855)  
Toll Free Specifier Fax Line: (888) DAV-MUL6 (888-328-6856)  
www.davismuller.com

These fixture designs are copyright protected. Davis/Muller reserves the right to change fixture design and specifications in any way that will not significantly alter appearance or performance.

©1999, 2006 Davis/Muller Lighting